

SNP-F50H SPECIFICATION

SPECIFICATION

For





Switching Mode Power Supply

For

Engineering Sample Approval

M/N : SNP-F50H

Standard Product

Reviewed by Mechanical Engineer						
Reviewed by Circuit Design Engineer						
Reviewed by Test Engineer						
Reviewed by Circuit Engineer						
Reviewed by Design Supervisor						
Reviewed by Product Manager						
Reviewed by Project Manager						
Typed by Project Secretary						
SKYNET ELECTRONIC		LAST REV. NO.				

SNP-F50H SPECIFICATION

F50H-051623

1.0 INTRODUCTIONS

SNP-F50H is an U-shape 500W power supply with remote sense function. By forced air cooling, the max. output can reach to 750W, It can also deliver 1000W for 2sec without shutdown. It is designed for ITE and medical BF application.

2.0 INPUT SPECIFICATIONS**2.1 Input voltage**

The range of input voltage is from 90VAC to 264VAC. Nominal line 115VAC/230VAC.

2.2 Input frequency

The range of input frequency is from 47Hz to 63Hz.

2.3 Input current

The maximum input current is 6A at 115VAC or 3A at 230VAC.

2.4 Inrush current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input, cold start at 25°C. (EMI capacitors excluded)

3.0 OUTPUT SPECIFICATIONS**3.1 Load range**

output	min. load	rated load	max. load	peak load	voltage range
+58V	0A	8.6A	12.9A	17.2 A	55.1V to 60.9V

3.1.1 Factory adjustment

At factory, the output in 60% rated load and nominal line condition, the +58V output is set to between 57.8V and 58.2V.

At peak load and nominal line, the output can last for 2sec without shut down.

3.1.2 Total output power

Can run up to rated load with convection cooling ; to max load with 18CFM forced air cooling.

3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 1%Vo at rated load and nominal line. Measuring is done by 15MHz band width limited oscilloscope and terminated output with a 0.47uF capacitor.

3.3 Line regulation

The line regulation for +58V output is less than +/- 0.5% while measuring at rated load and + -10% of nominal line input voltage changing

SNP-F50H SPECIFICATION

F50H-051623

3.4 Load regulation

The load regulation for +58V output is less than +/- 1% measuring are done by changing the measured output load + -40% from 60% rated load and nominal line

3.5 Capability for capacitive load

The output can handle capacitive load at start-up up to 200000uF.

3.6 Inductive load (sink current)

The +58V output can sink $\leq 5A$ current generated by inductive load for 5ms without instabilities (oscillations) on any outputs.

3.7 Remote sense

The +58V output has remote sense input which can compensates for 0.5V line drop min.

3.8 Fan off control

The cooling fan output (TB6) will turn-off to reduce the noise when the output power is lower than 30%±10% of max load.

4.0 GENERAL FEATURES**4.1 Efficiency**

The efficiency is typical 91% while measuring at nominal line and rated load.

4.2 Hold up time

The hold up time is 20mS typical at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

4.3 Protection**4.3.1 Over current protection**

Trip point :110% to 130% Maximum load, at nominal line.

Protection mode : Auto recovery

4.3.2 Short protection

Protection mode : Auto recovery

4.3.3 Over voltage protection

+58V trip point :+62V to 66V.

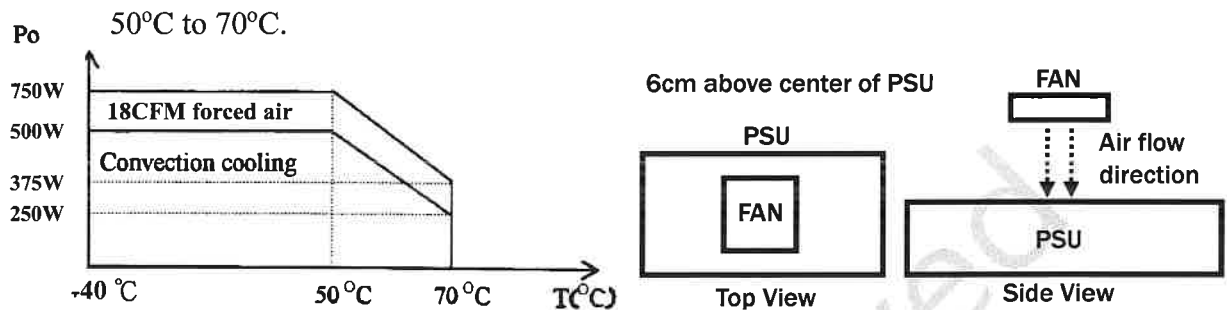
Protection mode : Latch-off.

SNP-F50H SPECIFICATION

F50H-051623

5.0 ENVIRONMENT SPECIFICATIONS**5.1 Operating temperature**

-40°C to 70°C, -40°C to 50°C no derating, above 50°C, derate at 2.5% per degree from

**5.2 Storage temperature**

-40°C to 85°C

5.3 Operating humidity

5% to 95% RH, non-condensing

5.4 Altitude

0 to 5000m

5.5 MTBF

>200Khrs(based on MIL-HDBK-217F, rated load, 50°C)

6.0 INTERNATIONAL STANDARDS**6.1 Safety standards (Label voltage: 100Vac to 240Vac)**

UL/EN/IEC62368-1

ANSI/AMMI/CSA/EN 60601-1

6.2 EMI standards

FCC level "B"

EN55032, level "B"

EN55011, level is "B"

EN 61000-3-2 class "D"

EN 61000-3-3

6.3 EMS standards

EN61000-4-2 8kV/contact discharge, 15kV/air discharge Criterion A

EN61000-4-3 10V/M with 80% AM Criterion A

EN61000-4-4 2kV Criterion A

EN61000-4-5 1kV/Line-Line, 2kV/Line-Earth Criterion A

EN61000-4-6 10V with 80% AM Criterion A

EN61000-4-8 30A/m Criterion A

EN61000-4-11 30% dips 500ms, Criterion A

60% dips 200ms, Criterion B

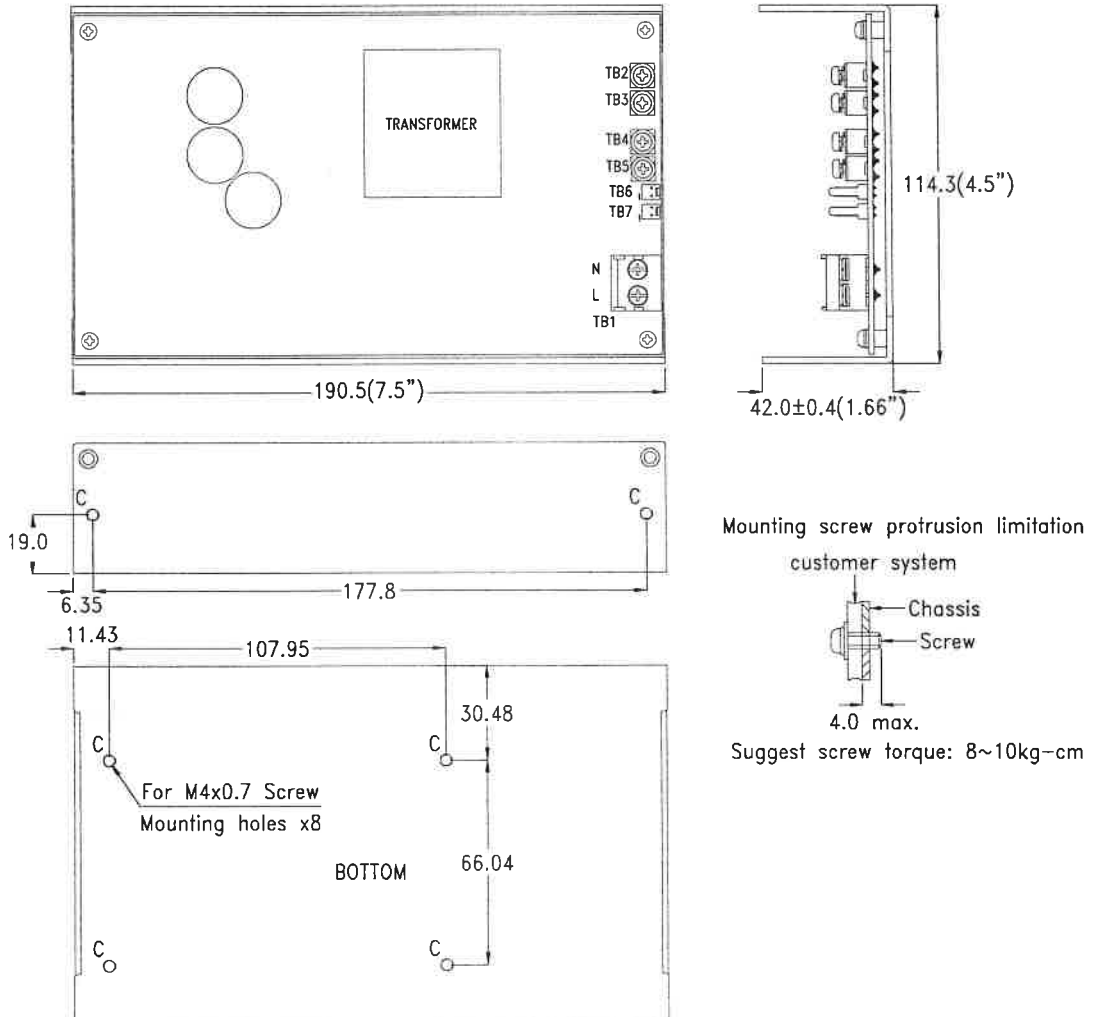
100% dips 10ms, Criterion A

100% dips 20ms, Criterion B

100% dips 5000ms, Criterion B

SNP-F50H SPECIFICATION**F50H-022223****7.0 Mechanical specification****7.1 Dimensions**

Dimensions below are shown in mm.

Tolerance specified is $\pm 0.4\text{mm}$ between mounting holes, $\pm 0.8\text{mm}$ other dimensions.**7.2 Connectors**

TB1 -- AC Input	: Terminal Blocks , pitch of 8.25 mm
TB2~5 -- DC Output	: Terminal Blocks
TB6 -- For +12V fan use only	: Molex 5045-02A or equivalent
TB7 -- Remote Sense	: Molex 5045-02A or equivalent

7.3 DC output pin assignment

TB2 & TB3	: GND	TB6	: Pin 1 GND	TB7	: Pin 1 -RS
TB4 & TB5	: +60V		Pin 2 FAN		Pin 2 +RS

7.4 Packing

Net weight	: 1735g approx. / unit
Carton size(mm)	: 362 (L) x 343 (W) x 258 (H)
Quantity	: 10 units / carton
Gross weight	: 16.0kg approx. / carton